

2-wire Plug & Play Fiber Optic Single Mode

linkedpro
by epcor®



Part Number:

EF-XXX-YY

Use XXX to specify length in meters:

50 = 50 m

100 = 100 m

150 = 150 m

200 = 200 m

300 = 300 m

Use YY to specify the type of connectors:

SC = SC-SC Duplex Connectors

LC = LC-LC Duplex Connectors



Connected Optical Fiber with waterproof mechanical connections without the need for fusions

- Up to 4 unions*
- EFUNION water-proof connector*

*Applies for reels with SC connectors

Characteristics

Wire color	White & Yellow
Wavelength Range	1310 – 1550 nm
Fiber type	Monomode 9/125, Tight Buffer 900 μm, G.652D
External diameter	5.4 mm
Covering	HDPE black color
Connectors	SC Duplex or LC Duplex
Attenuation 1310 nm (dB/km)	≤ 0.4
Attenuation 1550 nm (dB/km)	≤ 0.3
Operating temperature (°C)	-20°C ~ +60°C
Minimum radius of curvature (dynamic)	30 mm
Minimum radius of curvature (static)	20 mm

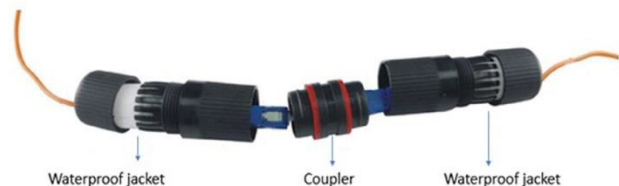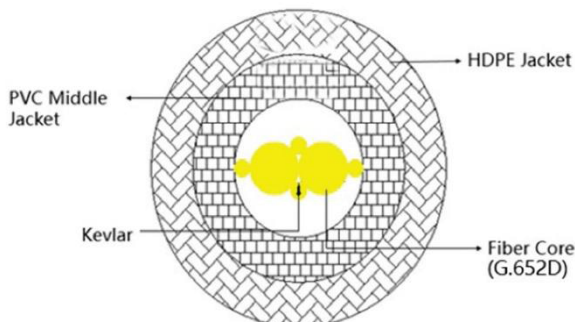

Waterproof jacket

Coupler

Waterproof jacket