



No Client Too Far

The Mimosa C5C-EF is a flexible connectorized client radio solution for accommodating long range and custom antenna solutions. Incorporating unique Multi-User MIMO technology and support for Mimosa's SRS technology, the C5C-EF enables the fastest speeds and is the most scalable wireless access solution available today. The C5C-EF is ideal for professionally-installed rural fixed wireless and long range applications for point-to-point backhaul links.

Flexible Antenna Options

Connect to virtually any dual polarization antenna to custom engineer longer distance client links. The C5C-EF has dual RP-SMA connectors for easy cabled antenna connectivity. It can be mounted to any pole via hose clamps or easily clipped onto antennas supporting compatible clip-on mounting bracket systems.

PTP Backhaul Links

The C5C-EF provides extreme price/ performance for PTP backhaul links in a small form factor. Wide frequency range support allows avoidance of crowded 5 GHz spectrum bands. Where regulations allow, long distances are enabled with high system power and flexible antenna options.

SRS Client

The C5C-EF offers client-side support for Mimosa's proprietary Spectrum Reuse Synchronization (SRS) technology. This ensures each client device precisely receives and transmits under the timing control of the access point and can dynamically request upstream bandwidth. As opposed to alternative (fixed) timeslot protocols, upstream bandwidth and latencies are allocated on demand which enables significantly higher overall upstream network bandwidth utilization.

Technical Specifications

Performance

- **Max Throughput:**
500+ Mbps IP (866 Mbps PHY)
- **Wireless Protocols:**
WiFi Interop
Mimosa SRS
- **Modes:**
PTMP Client
PTP Backhaul

Radio

- **MIMO & Modulation:**
2x2:2 MIMO OFDM up to 256-QAM
- **Bandwidth*:**
20/40/80 MHz channels tunable to 5 MHz increments for Mimosa SRS;
Tunable to standard WiFi channels for WiFi Interop
- **Frequency Range:**
PTMP: 4900 - 6200 MHz
PTP: 4900 - 6400 MHz
- **Max Output Power:**
27 dBm
- **Sensitivity (MCS 0):**
-87 dBm @ 80 MHz
-90 dBm @ 40 MHz
-93 dBm @ 20 MHz

Power

- **Max Power Consumption:**
12.9 W
- **System Power Method:**
Passive PoE (24-56VDC)
- **PoE Power Supply:**
Passive PoE compliant, 48-56 V Power over Ethernet supply (included)

Physical

- **Dimensions:**
Depth - 44.0 mm (1.73")
Width - 65 mm (2.56")
Height - 188.4 mm (7.42")
- **Weight:**
295 gr (10.4 ounces)
- **Mounting:**
Single pole strap
- **Connector Type:**
RP-SMA (x2)

Environmental

- **Operating Temperature:**
-40°C to +55°C (-40°F to 131°F)
- **Operating Humidity:**
5 to 100% condensing
- **Outdoor Ingress Protection Rating:**
IP55
- **Operating Altitude:**
4,420 m (14,501') maximum
- **Shock & Vibration:**
ETS 300-019-2-4 class 4M5

Features

- **Gigabit Ethernet:**
10/100/1000-BASE-T
- **Multi-User MIMO**:**
CPE is MU-MIMO capable
- **Management Services:**
Mimosa cloud monitoring and management
SNMPv2 & Syslog legacy monitoring
HTTPS
HTML 5 based Web UI
- **Smart Spectrum Management:**
Active scan monitors/logs ongoing RF interference across channels (no service impact)
Dynamic auto-optimization of channel and bandwidth use
- **Security:**
WPA2 + Mimosa 802.1x Client**
- **QoS:**
Supports 4 pre-configured QoS levels


Regulatory + Compliance

- **Approvals:**
CE, ETSI 301 893/302 502
- **RoHS Compliance:** Yes
- **Safety:** UL/EC/EN/ 60950-1 + CSA-22.2


* 4.9 GHz uses 20 MHz channel widths (US only, regulations vary by region)
** Enabled in future software release



C5C-EF on Pole

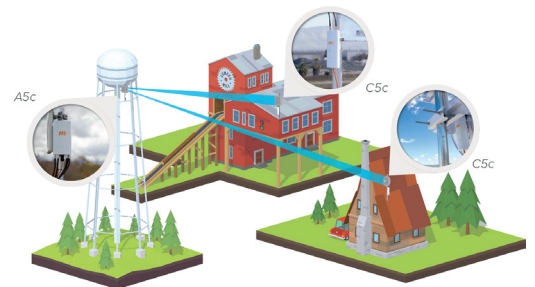

Point-to-Multipoint

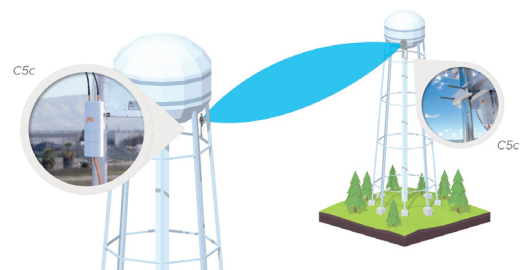

Backhaul